




SUPPLEMENT TO THE WIRING DIAGRAMS

to include the

***Kodak X-Omat* MULTILOADER 300 Plus**

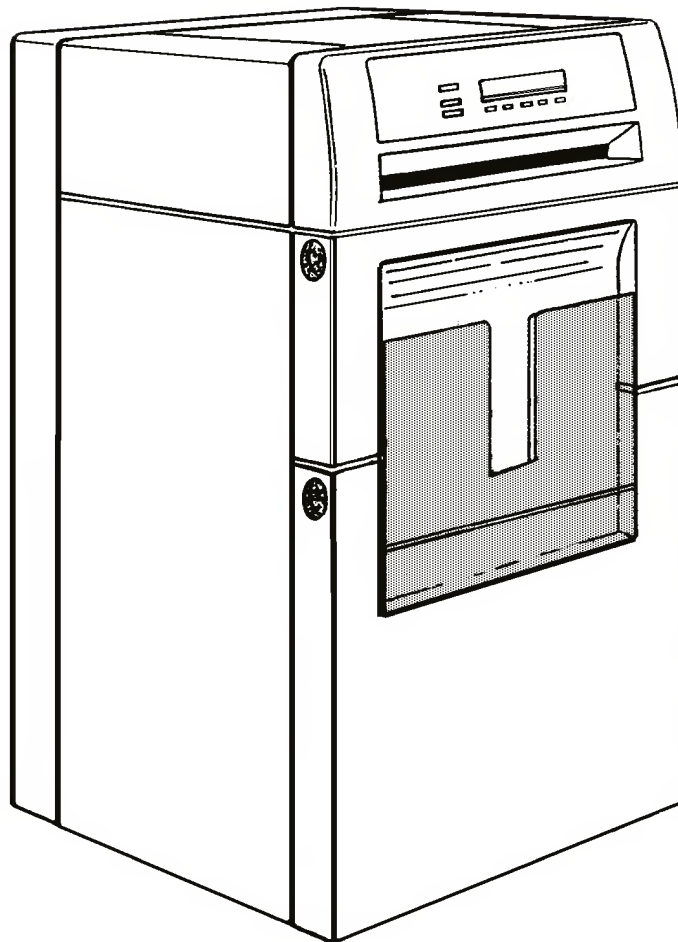

PLEASE NOTE

The information contained herein is based on the experience and knowledge relating to the subject matter gained by Kodak prior to publication.


No patent license is granted by this information.


Kodak reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from the use of this information, even if loss


CHAPTER 1

Note

- THE XML 300 Plus has an integrated Kodak X-Omat Processor 3000 RA. The SENSORS of the PROCESSOR ENTRANCE DETECTOR ROLLERS are moved back into the PROCESSOR INTERFACE of the XML 300 Plus. They are called SENSOR B25 FILM DETECTOR RIGHT and SENSOR B26 FILM DETECTOR LEFT. Both SENSOR are marked on the drawings of page 1-3 and 1-4 with a black line, and on page 1-5 with arrows.
- A different TRANSFORMER T1 is used for the XML 300 Plus. The TERMINAL BLOCK of T1 XML 300 was orange and the TERMINAL BLOCK of T1 XML 300 Plus is grey. The wiring of the NEUTRAL CONNECTOR X5-4 is changed. It is no longer interrupted by CONTACTOR K1 (8-7). See the drawing on page 1-2.

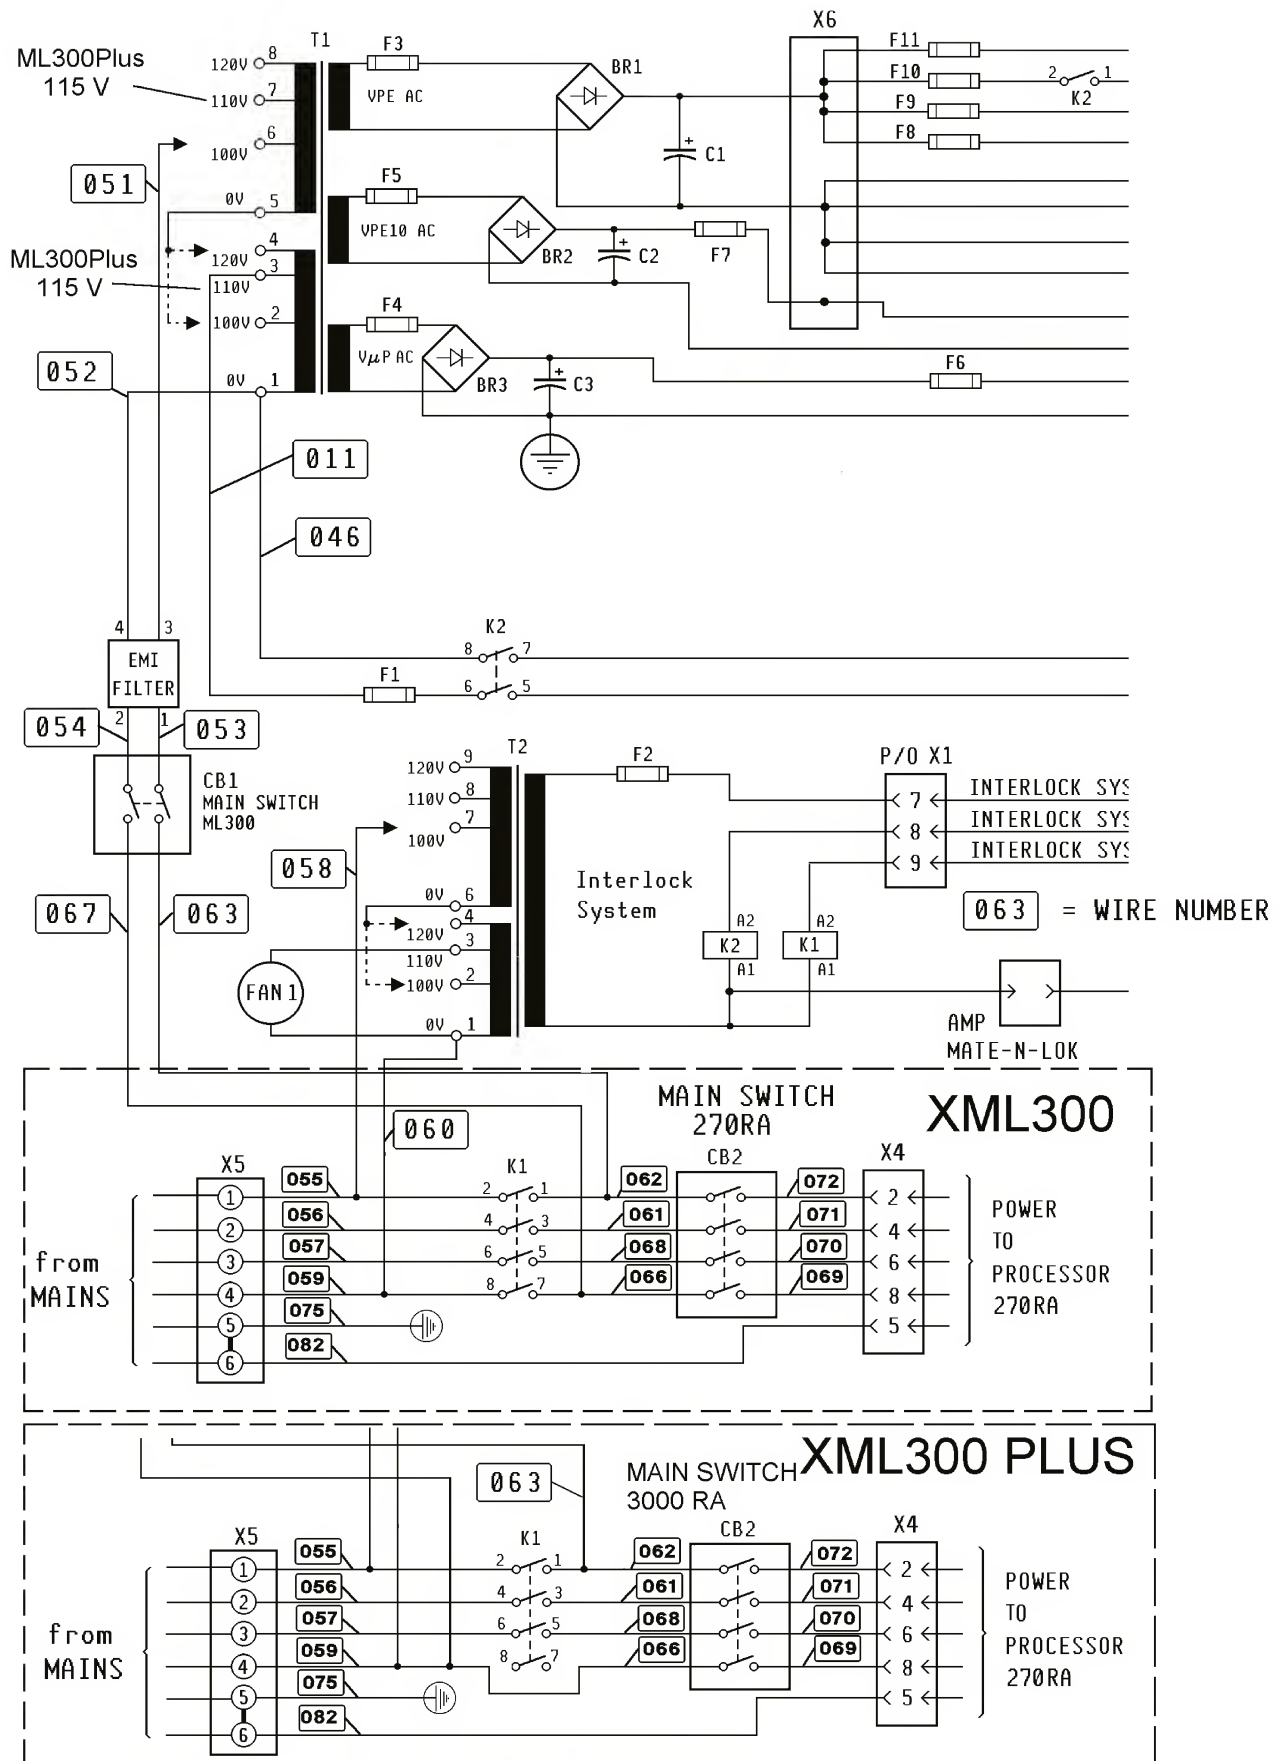


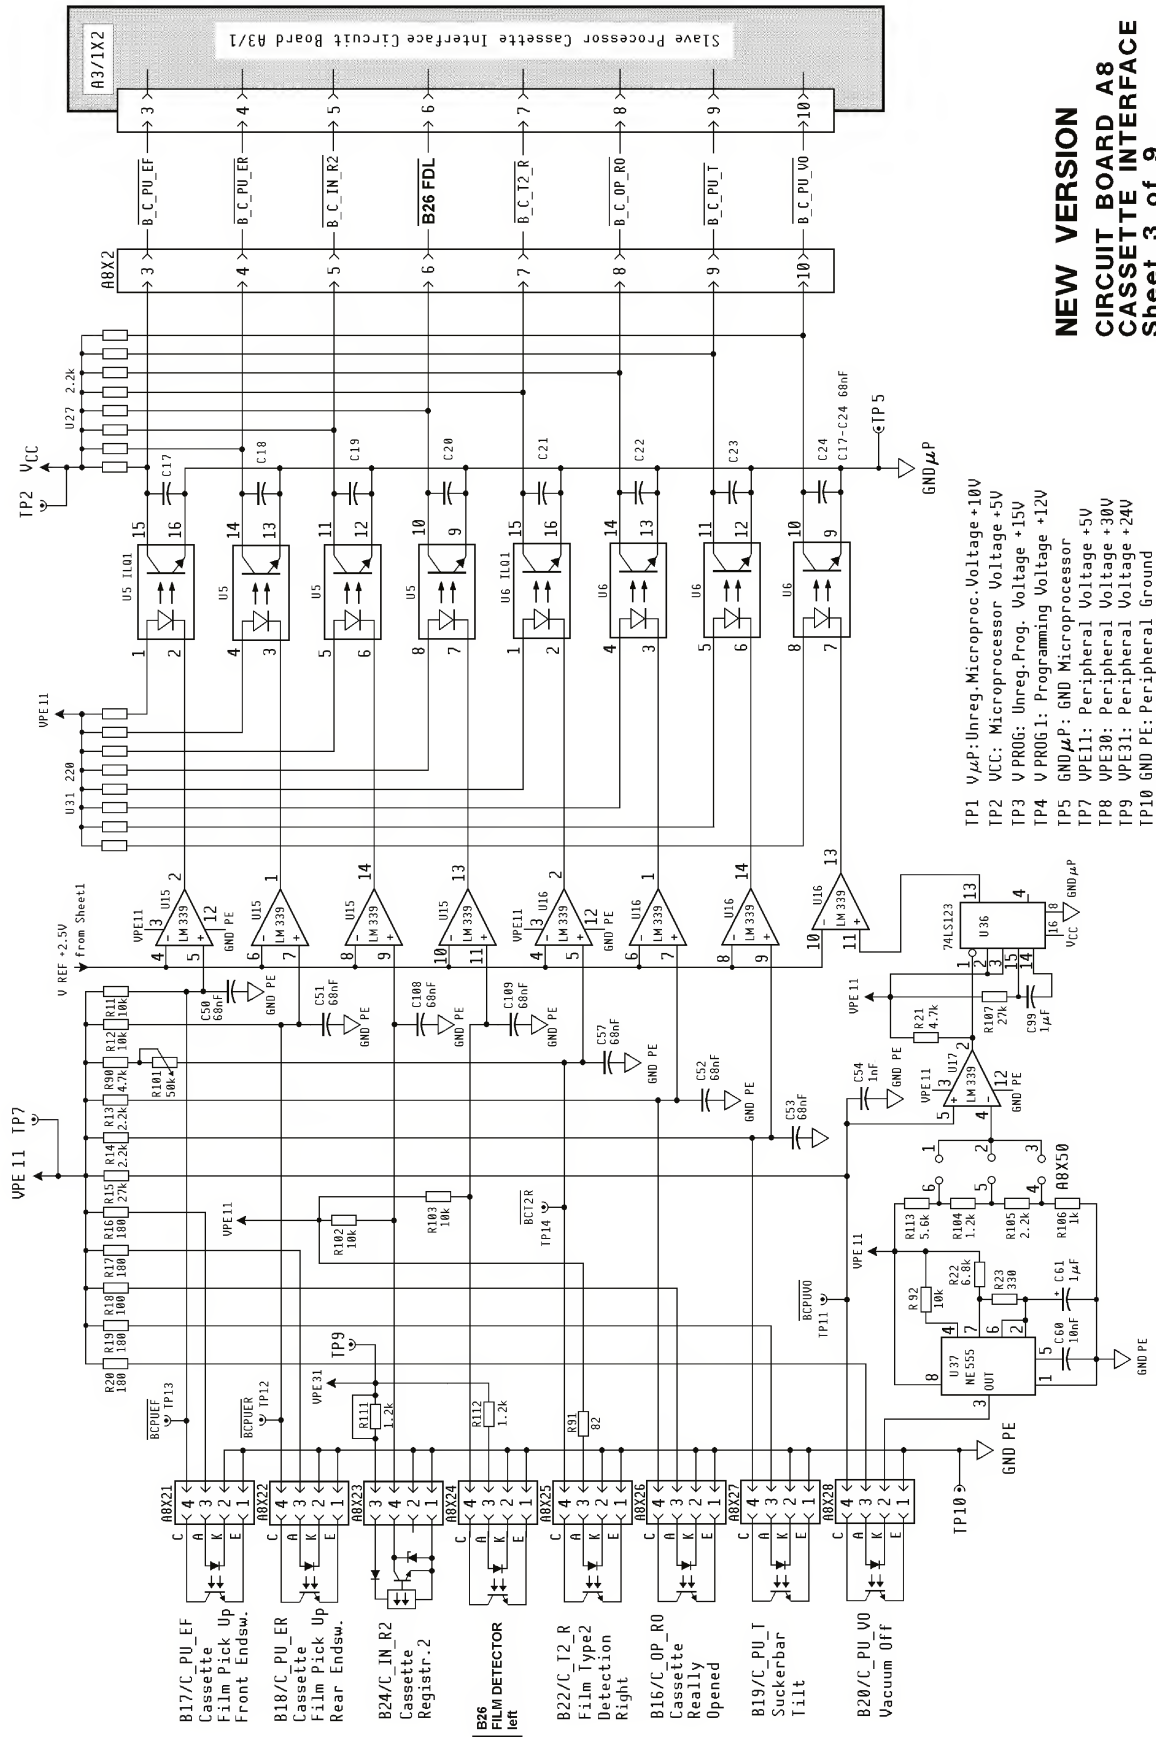

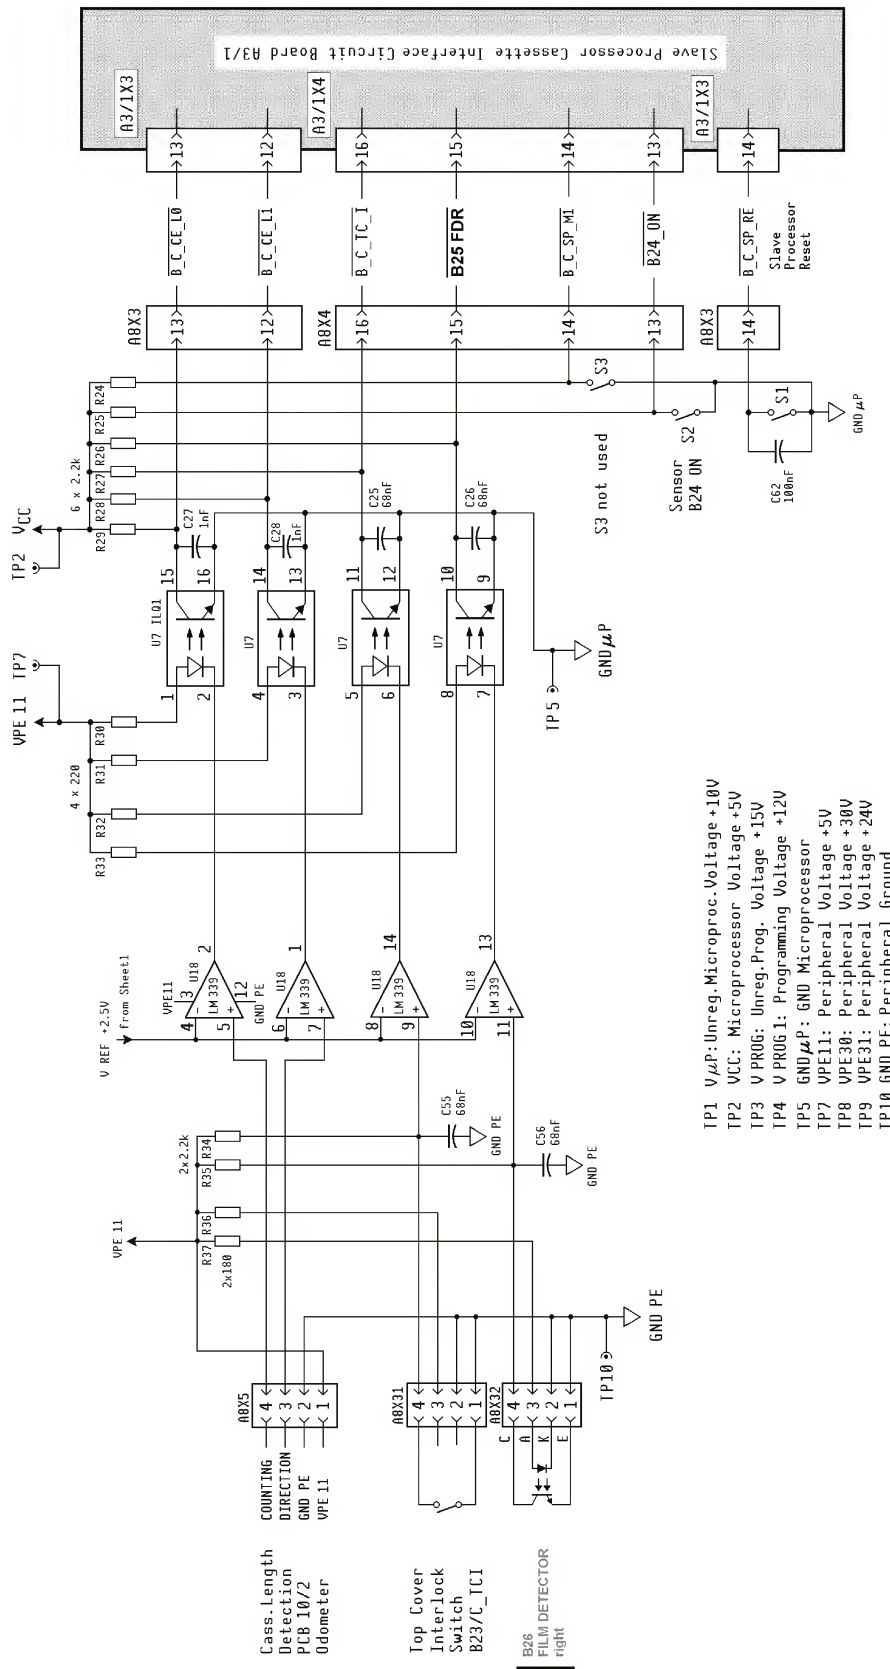

CIRCUIT BOARD A8
CASSETTE INTERFACE
Sheet 4 of 9
INPUT SECTION

- TP1 V_{μP}: Unreg. Microproc. Voltage +10V
- TP2 VCC: Microprocessor Voltage +5V
- TP3 V_{PR06}: Unreg. Prog. Voltage +15V
- TP4 V_{PR06 I}: Programming Voltage +12V
- TP5 GND_{μP}: GND Microprocessor
- TP7 VPE11: Peripheral Voltage +5V
- TP8 VPE30: Peripheral Voltage +30V
- TP9 VPE31: Peripheral Voltage +24V
- TP10 GND PE: Peripheral Ground

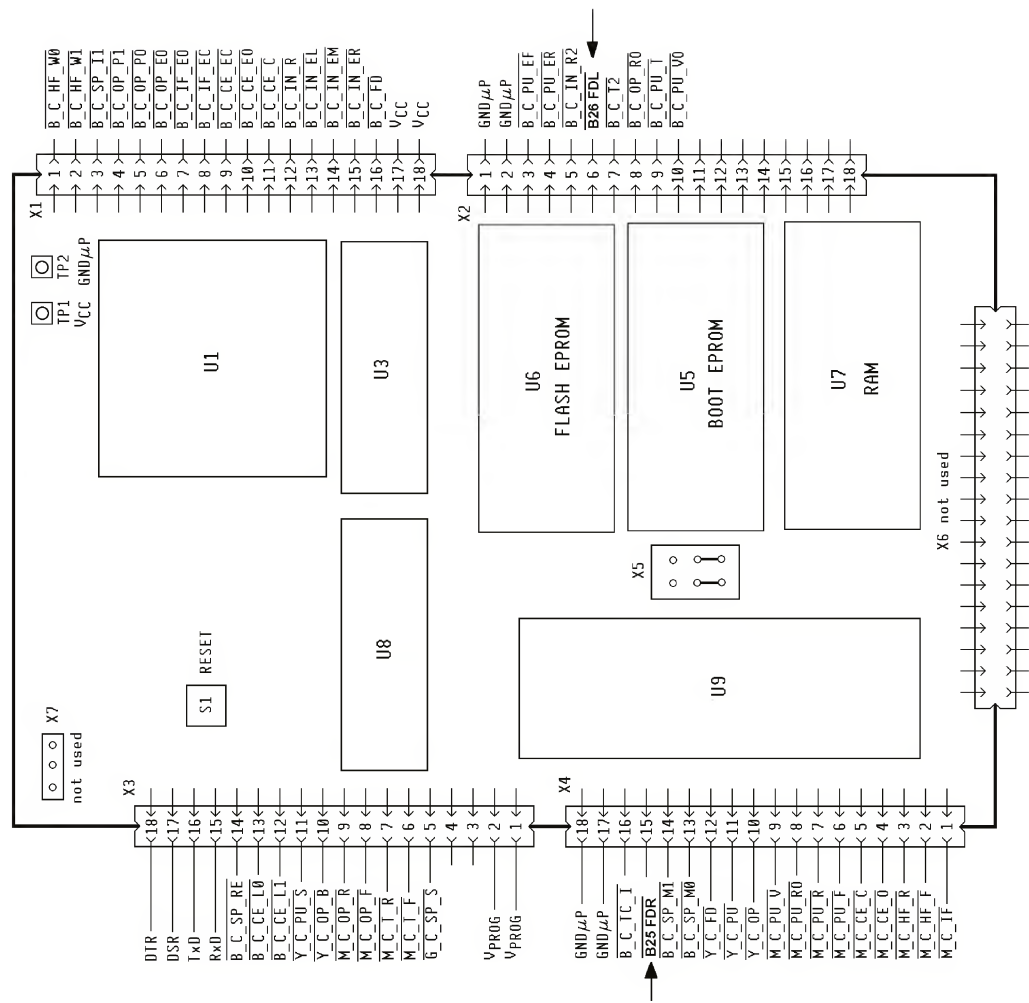

Kodak AG
Hedelfinger Str. 54-60
70327 Stuttgart
Germany

Kodak, Min-R, X-Omat and X-Omatic are trademarks



CUSTOMER EQUIPMENT SERVICES KODAK AG STUTTGART